



Kuro™ 80 - Roller Blind with Side Channels  
for Windows by Umbra  
in Blindspace® C110x150


HEAD BOX C110x150SS

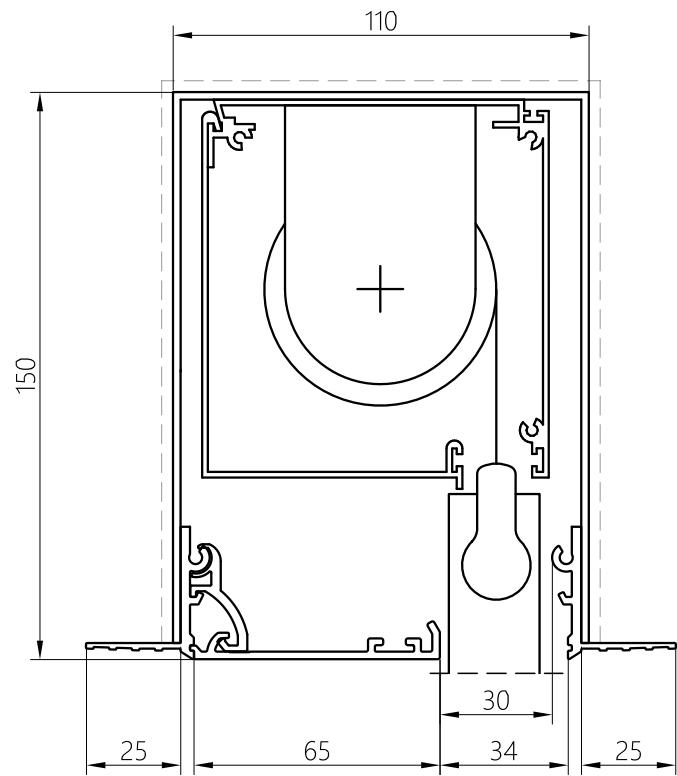

SIDE BOX C110x50SS (OPTIONAL)

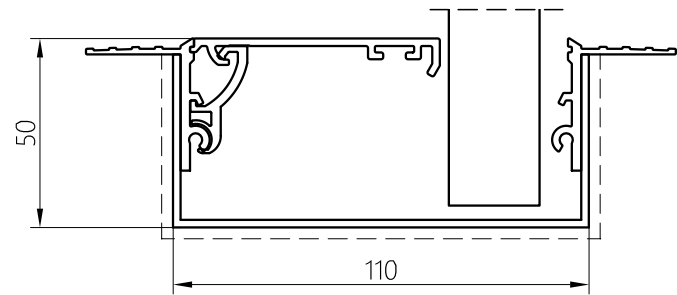

HEM BAR BOX C110x70SS (OPTIONAL)

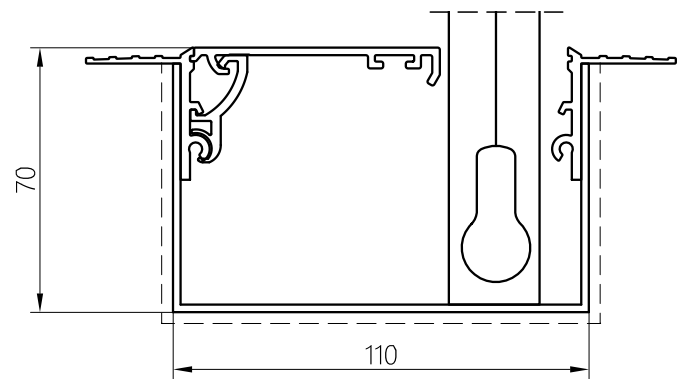

1:2 scale


PRODUCT REFERENCE

C110x150SS  
SERIES SIZE CORNERS

CONCEALMENT CONFIGURATION OPTIONS



Head Box




Head Box  
+ Side Boxes




Head Box  
+ Side Boxes  
+ Hem Bar Box


FRONT CORNERS VARIATIONS




P- Perforated Flange




S- Skim Coat Flange




U- Upstand Flange



V- Visible Flange



N- No Flange



COVER HINGE  
to hold cover plate,  
installed on either side

|                      |                                                                                                                                                                                                                                                                                                        |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product              | Umbra solution for blinds in dedicated concealed Blindspace® boxes                                                                                                                                                                                                                                     |
| Description          | Recessed roller blind application concealed in dedicated box with hinged cover flush with wall or ceiling finished surface.                                                                                                                                                                            |
| Blind sizes          | Please see size chart and supplier details for blind sizes such as max. width, height and area.                                                                                                                                                                                                        |
| Finishes             | Provided in RAL 9016 (white)<br>Optional powder coating to other RAL colours available.                                                                                                                                                                                                                |
| Material             | Powder Coated Aluminium, Back Box EN AW-1050A, Front Corners and Cover EN 6063 T6                                                                                                                                                                                                                      |
| Optional accessories | End cap<br>Splice pin (to align boxes)<br>Splice plate (to align covers)<br>Chain guide (for manual blinds)<br>Covers in various widths                                                                                                                                                                |
| Box length           | 3000mm<br>Cut to size for shorter lengths.<br>Spliced together for longer lengths.                                                                                                                                                                                                                     |
| Installation         | Boxes to be fixed with countersunk screws every 200mm through back (and both flanges when available) into appropriate backing.<br>Scrim tape to be used on flanges.<br>Finished plaster level to be flush with cover. Allow 3mm recess space for ease of installation, shown in dash line around boxes |
| Print date           | 2024/01/03                                                                                                                                                                                                                                                                                             |
| Page size            | ISO A3 420x297                                                                                                                                                                                                                                                                                         |

