
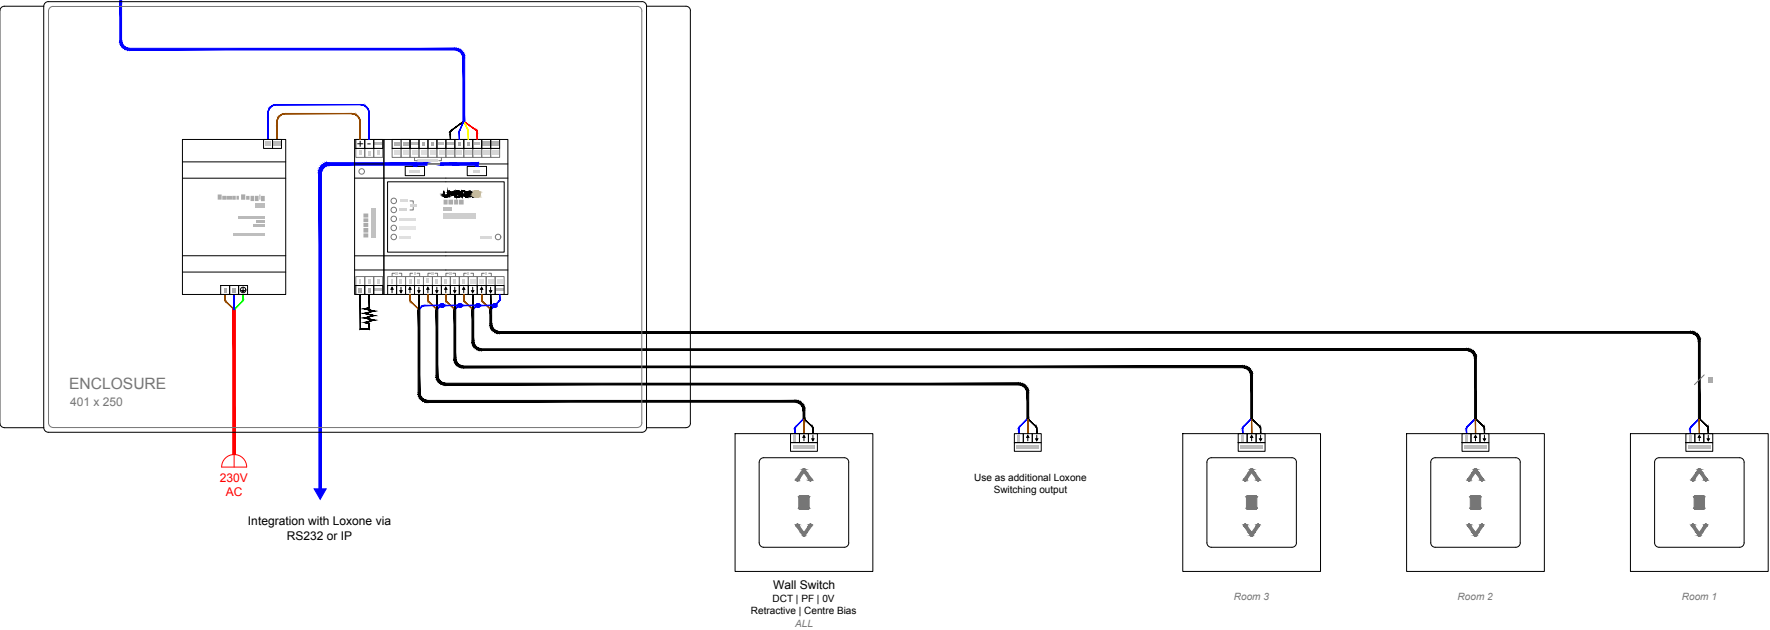
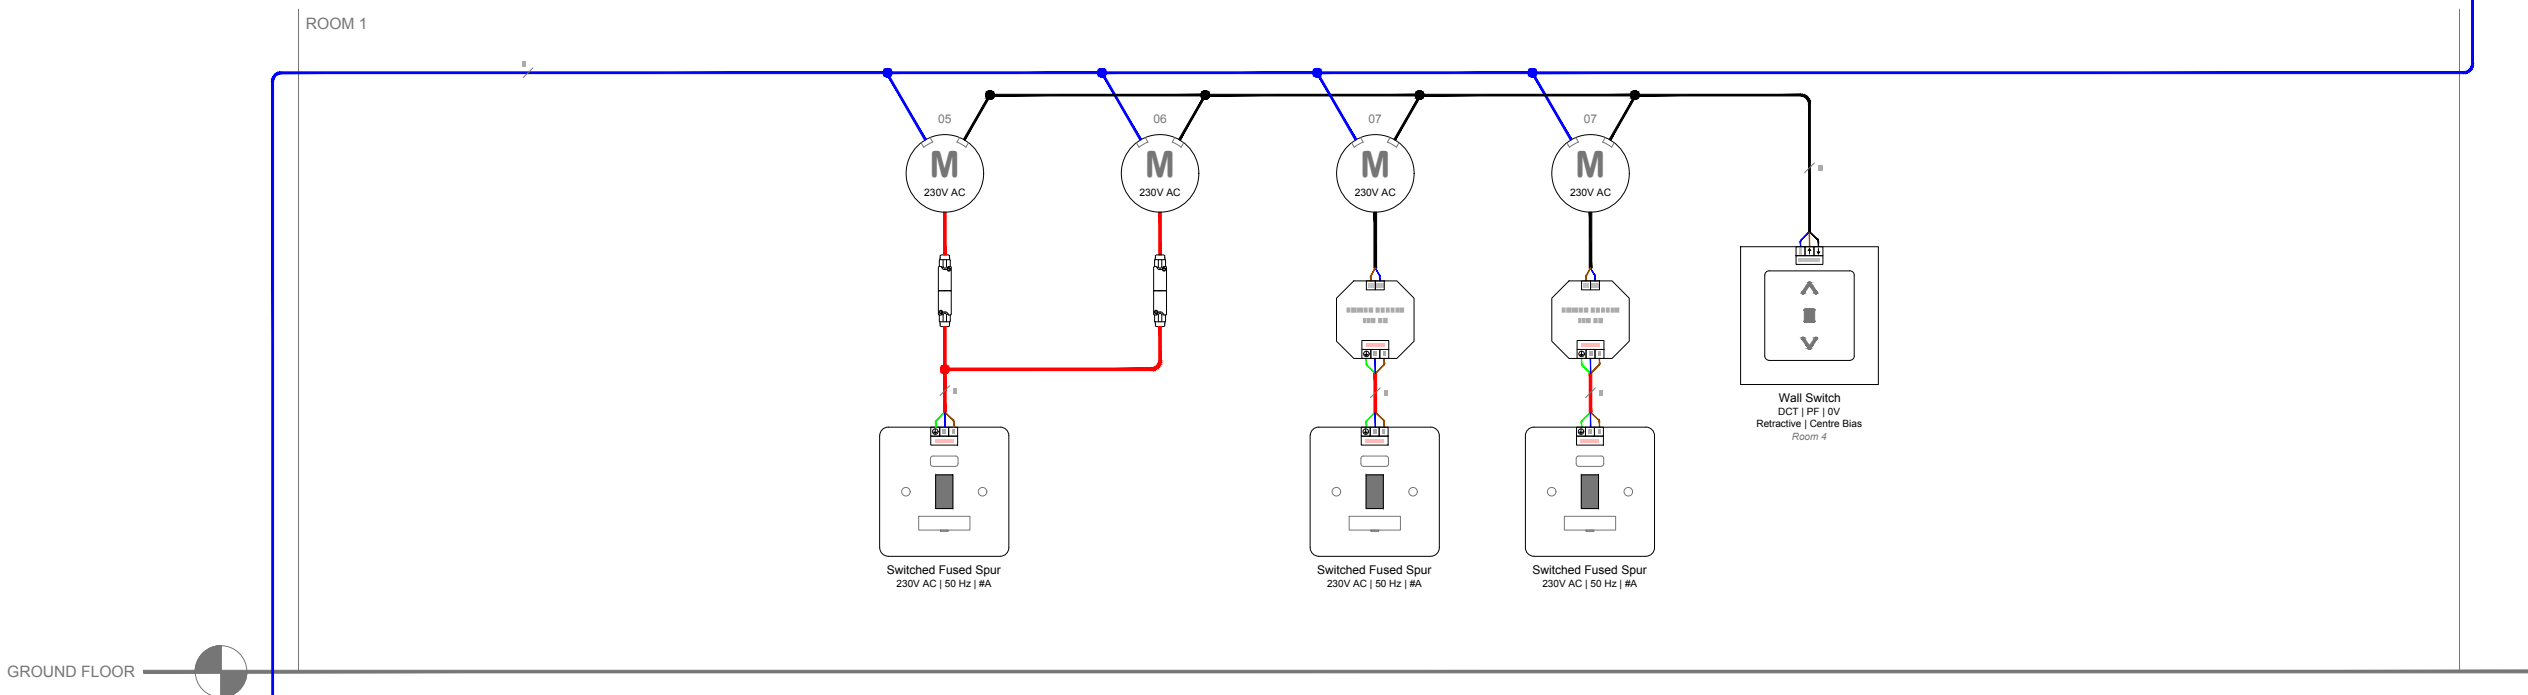


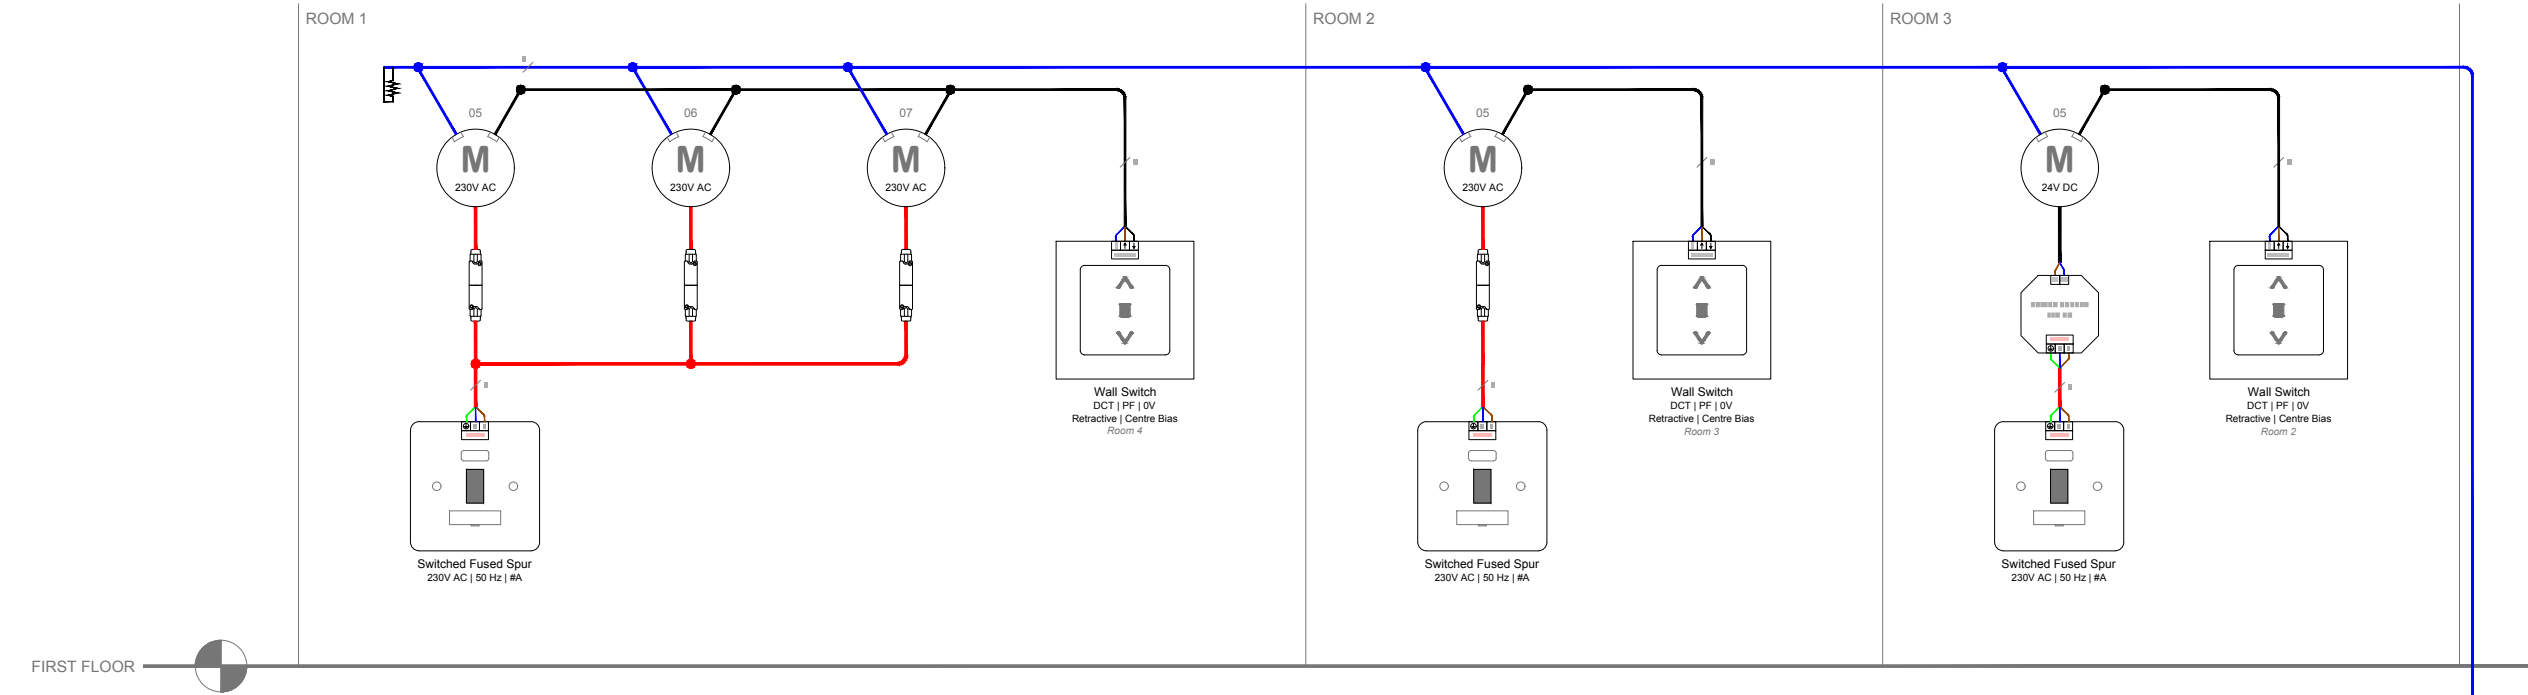

Specification, printing errors and details are subject to change without notification.

No acceptance of responsibility for any use made of this document other than for that which it was prepared and issued.

Do not Scale. Use figured dimensions only.

All drawings to be read in conjunction with product Datasheets.

Any discrepancies to be reported to Umbra before any work commences.

WIRING				
Label	Connection	Cables	Twisted pairs	Max. Dis.
A	Motors	Min.: 4 x 1.5 mm ² Max.: 4 x 2.5 mm ²	-	100m
B	Motor Controller Extensions	Min.: 2 x 0.6 mm ² Max.: 2 x 2.5 mm ²	Required	50m
C	Switches	Min.: 3 x 0.6 mm ² Max.: 3 x 2.5 mm ²	Recommended	100m
D	Bus DCT PF	Min.: 4 x 0.6 mm ² Max.: 4 x 1.5 mm ²	Recommended	1000m
E	220-240 V AC	Min.: 3 x 0.75 mm ² Max.: 3 x 2.5 mm ²	-	
F	Bus DIGITAL	Belden 3107A 22 AWG	Required	600m

UMBRA®

31 Ystrad Road
Swansea West Business Park
Swansea SA5 4BT
01792 562015
www.umbra.co.uk

Title:

STRATA®

Drawing:

Digital
Solution Example

Print Size : A3	Drawn by: --	Approved: --	Date: 08.07.2023
--------------------	-----------------	-----------------	---------------------

Drawing No.: UMBRA.01.03	Rev 00
-----------------------------	-----------

DIVULGENCE AND REPRODUCTION SUBJECT TO COPYRIGHT